




OTTO X Pendant

TECHNICAL SPECIFICATIONS

No. 448

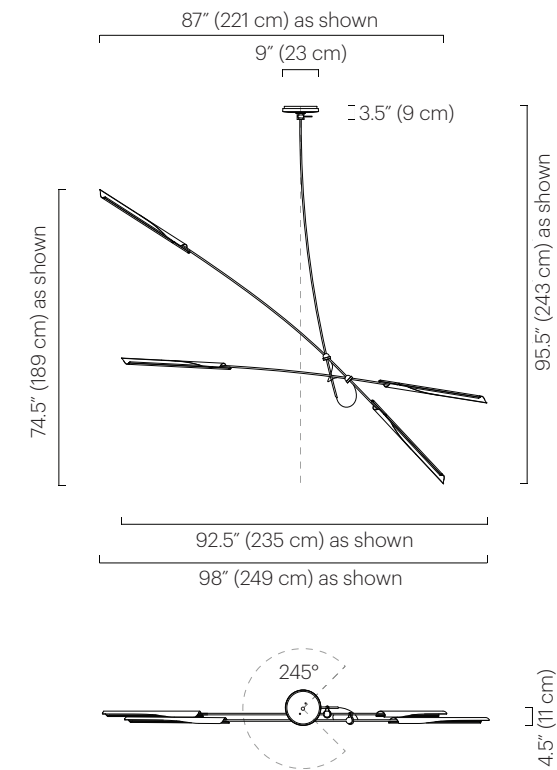

Description

The OTTO X features two intersecting arms with an OTTO shade on each end extending from a drop. The naturally occurring arcs of the fixture will vary depending on the length of the drop. All four OTTO shades contain a dimmable LED source. Each shade rotates 300° to cast light directionally. The fixture can rotate 245° from the canopy.

Materials

Shades: Powder coated aluminum
Ceiling mount: Powder coated and plated aluminum
Frame: Plated brass
Drop: Plated brass
Hardware: Plated and polished brass

Shade Color

- Black Satin (ivory satin interior)
- Grey Gloss (ivory satin interior)
- Ivory Satin (ivory satin interior)
- White Satin (white satin interior)

Custom colors available.

Finish

- Brushed Brass
- Polished Nickel
- Oil Rubbed Bronze

Custom finishes available.

Lamping

LED: Warm white 2700K
Lumens: 3360 (equivalent to four 60W incandescent bulbs)
CRI: 80+
50,000 LED life hours (approx.)

Power Supply

60W 24V
For 120V areas: dimmable Class 2 included in canopy.
For 220-240V areas: remote power supply only. Not included.

Dimmer Compatibility

Dimmable with MLV/TRIAC (leading edge) switch

Voltage / Wattage

24V / 44 watts

Weight

10 lbs (4.5 kg)

Remarks

Specify drop length.
Fixed drop not adjustable on site.
Arm length is fixed.
Not for use on sloped ceilings.
Black exterior electrical cord is standard.

Remarks continued

Hardware finish consistent with frame finish.
Ceiling mount consistent with shade color.
Additional weight support recommended for junction box installation.
Indoor use and dry locations only.

Dimensions

4.5" D x 98" W x 74.5" H
(11 D x 249 W x 189 cm H)
Canopy mount: 9" Ø x 3.5" H
(23 Ø x 9 cm H)
Shade: 1.5" Ø x 28" L
(4 Ø x 71 cm L)
Min overall height: 74" (188 cm)
Max overall height: 159" (404 cm)