

# Scala Flush Mount



Technical
<b>Specifications</b>

Materials	Glass, Wood, Steel
Product weight	185 lbs
Lead time	12 weeks
Integrated LED	25,245 lm / 2700 K / 285 W / 92+ CRI
Input Voltage	120 V, 240 V or 277 V
Dimmer	TRIAC, ELV or 0–10 V
Certifications	UL, ETL listed, damp-rated








#### Notes


- Universal canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
- This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- Dimensions may vary within half an inch.
- The LED lifetime is 50,000 hours.
- The driver is included within the fixture.
- This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated


April 29, 2025

In Common With Scala Flush Mount incommonwith.com

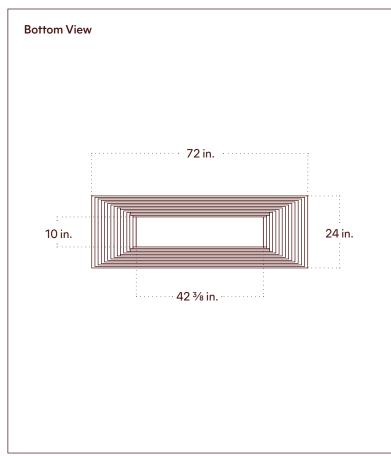


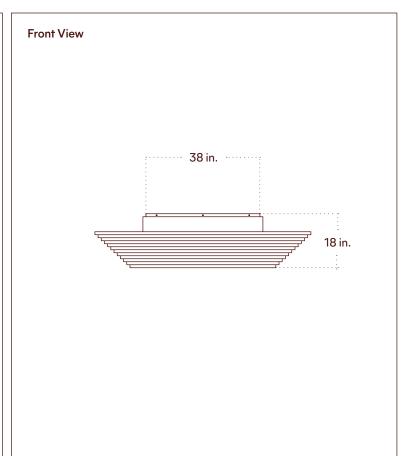

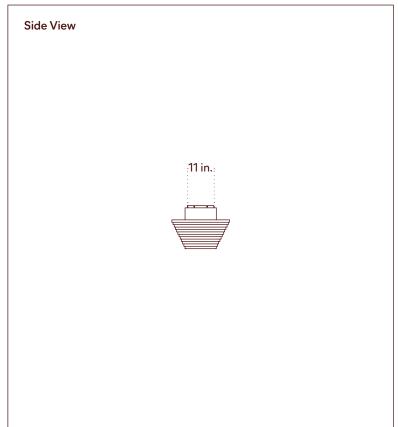

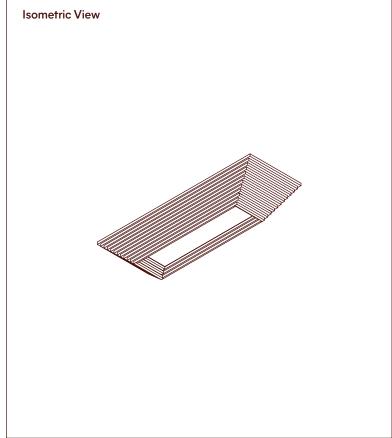


### Front View




Powder




Basketweave



Irregular Basketweave




Patchwork



Bond

### Powder Glass

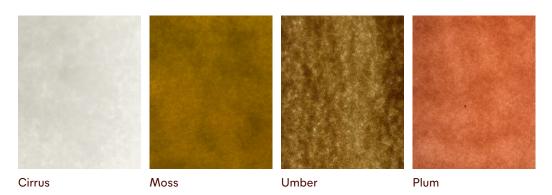

### Striped Glass



## Patterned Glass



### Wood







Oak

Leopardwood

Darkened Leopardwood