

## Verso Surface Mount, Small




Technical Specifications	Materials	Glass, Brass–plated steel
	Product weight	8 lbs
	Lead time	12 weeks
	Integrated LED	2,025 lm / 2700 K / 25 W / 92+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0–10 V
	Certifications	UL, ETL listed, damp-rated, ADA compliant  CUL US ADA DAMP  ADA


Notes


- 1. This fixture can be installed on a wall or ceiling.
- 2. This fixture can be installed vertically or horizontally.
- Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
- 4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- 5. Dimensions may vary within half an inch.
- 6. The LED lifetime is 50,000 hours.
- 7. The driver is included within the fixture.
- 8. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
- This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.


Updated

April 29, 2025

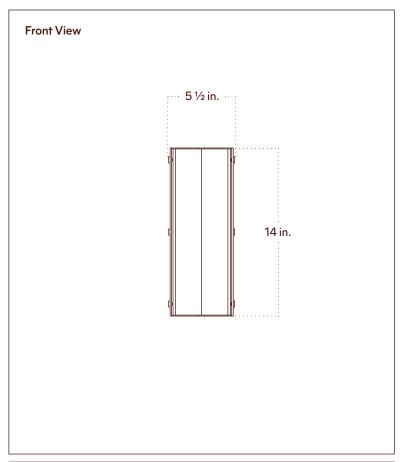

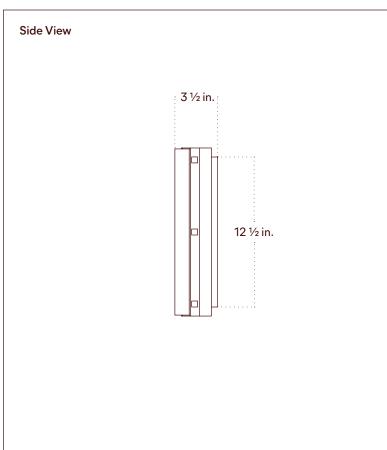

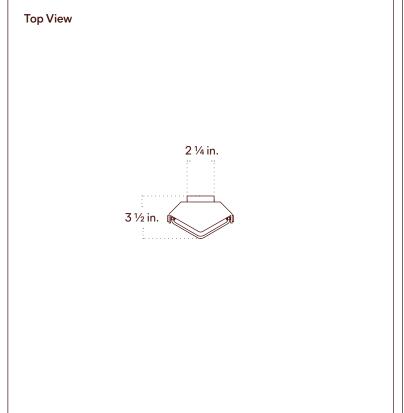

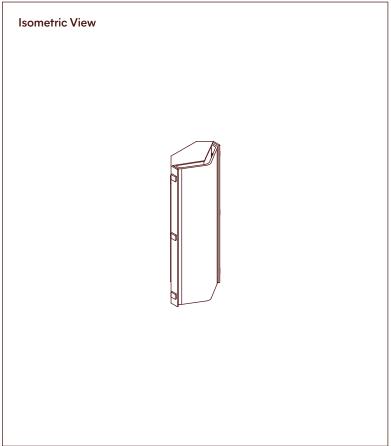

# Verso Surface Mount, Small, Plug-in




Technical Specifications	Materials	Glass, Brass–plated steel
	Product weight	8 lbs
	Lead time	12 weeks
	Integrated LED	2,025 lm / 2700 K / 25 W / 92+ CRI
	Input Voltage	120 V
	Dimmer	Integrated dimmer switch
	Certifications	UL, ETL listed
		c UL) us Objus


Notes


- 1. This fixture is installed vertically.
- Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
- This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- 5. Dimensions may vary within half an inch.
- 6. The LED lifetime is 50,000 hours.
- 7. The driver is included within the fixture.
- 8. This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated


April 29, 2025

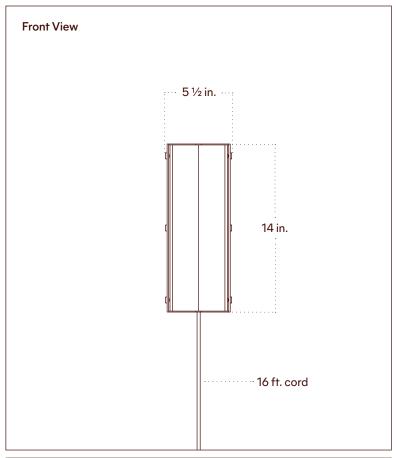

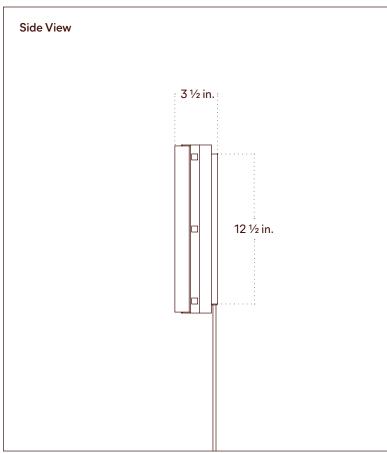

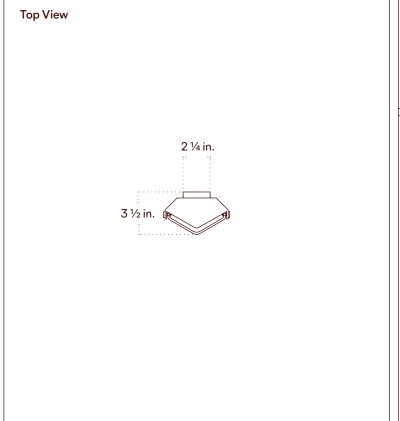

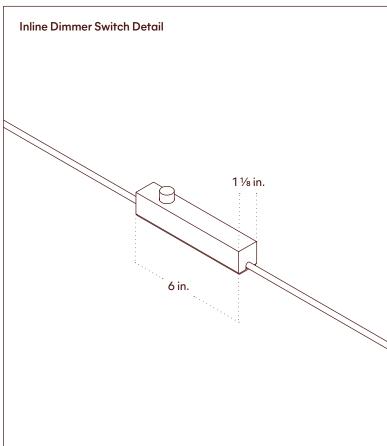

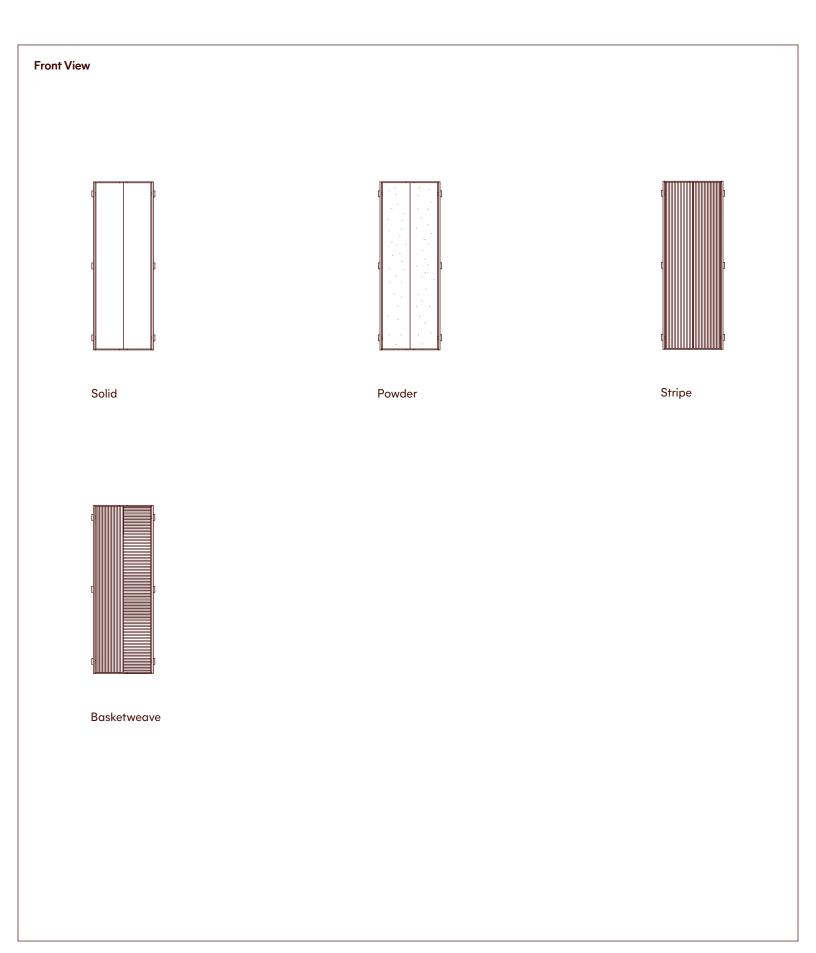

## Verso Surface Mount, Medium




Technical Specifications	Materials	Glass, Brass–plated steel
	Product weight	15 lbs
	Lead time	12 weeks
	Integrated LED	3,713 lm / 2700 K / 45 W / 92+ CRI
	Input Voltage	120 V, 240 V or 277 V
	Dimmer	TRIAC, ELV or 0–10 V
	Certifications	UL, ETL listed, damp-rated, ADA compliant


Notes


- 1. This fixture can be installed on a wall or ceiling.
- Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
- This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- 4. Dimensions may vary within half an inch.
- 5. The LED lifetime is 50,000 hours.
- 6. The driver is included within the fixture.
- 7. This fixture is designed so the LED board can be replaced when it reaches its lifetime.
- 8. This fixture meets the requirements of the Americans with Disabilities Act (ADA) of 1990.


Updated

April 29, 2025

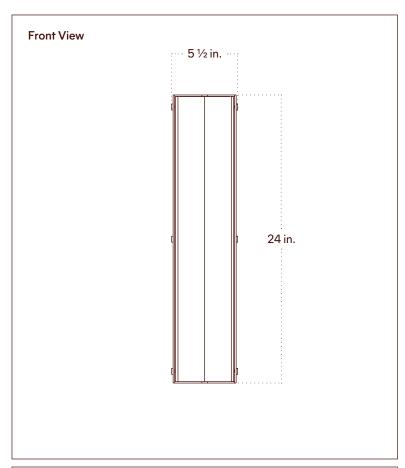

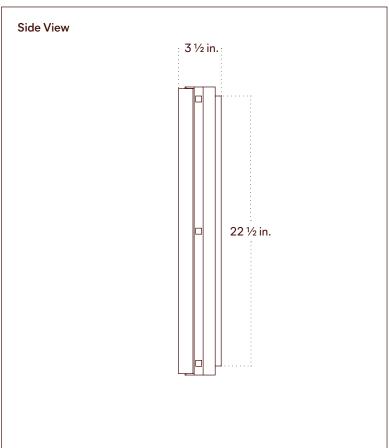

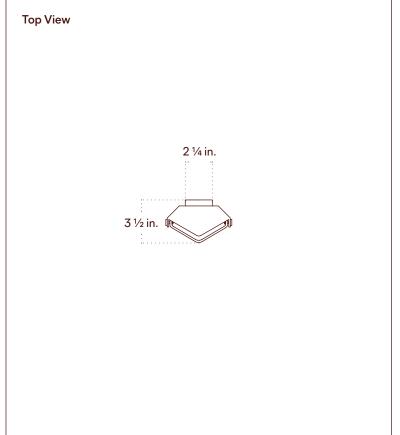

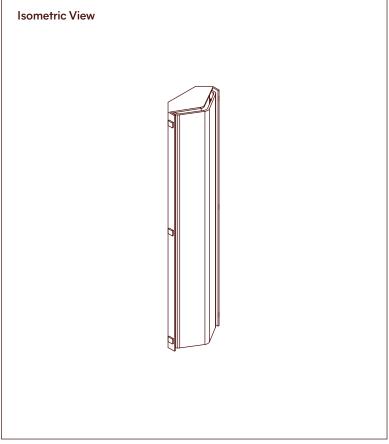

# Verso Surface Mount, Medium, Plug-in



Technical Specifications	Materials	Glass, Brass–plated steel	
	Product weight	15 lbs	
	Lead time	12 weeks	
	Integrated LED	3,713 lm / 2700 K / 45 W / 92+ CRI	
	Input Voltage	120 V	
	Dimmer	Integrated dimmer switch	
	Certifications	UL, ETL listed	







#### Notes


- 1. This fixture is installed vertically.
- Designed for installation with a standard one-gang outlet box. Canopy mounting is located at the center of the fixture. Additional anchor holes are available for added support.
- This fixture comes with a 16-foot chocolate brown fabric cord. The dimmer switch is our black painted metal finish and is located 8 feet from the plug.
- 4. This fixture has handmade elements and may exhibit variability within the same piece. These variations are inherent in the production process and are not to be considered as defects. We do our best to maintain a consistent product while honoring handmade craftsmanship.
- 5. Dimensions may vary within half an inch.
- 6. The LED lifetime is 50,000 hours.
- 7. The driver is included within the fixture.
- 8. This fixture is designed so the LED board can be replaced when it reaches its lifetime.


Updated


April 29, 2025

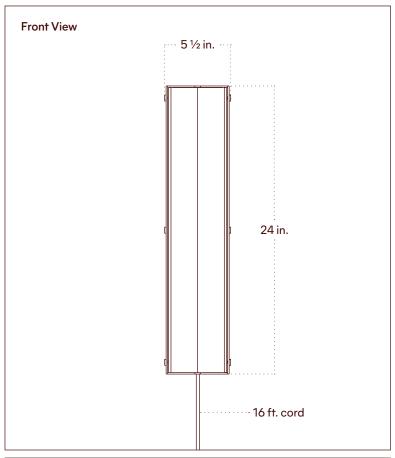

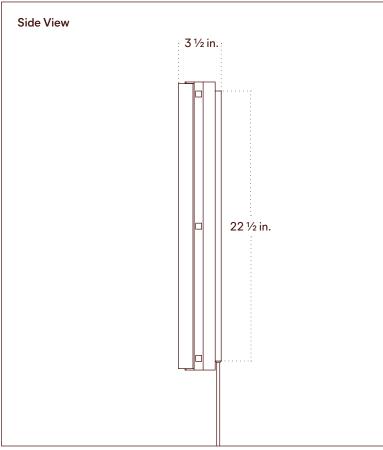


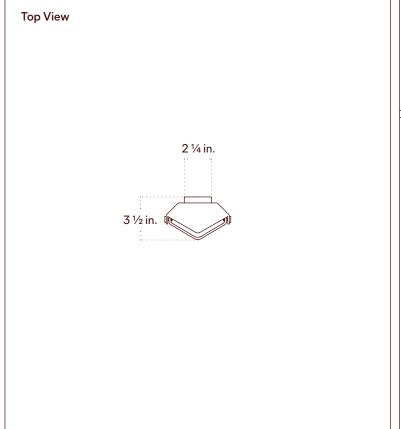

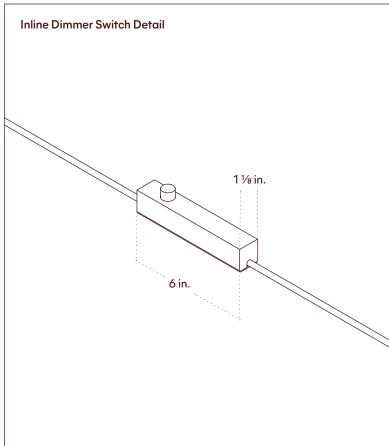


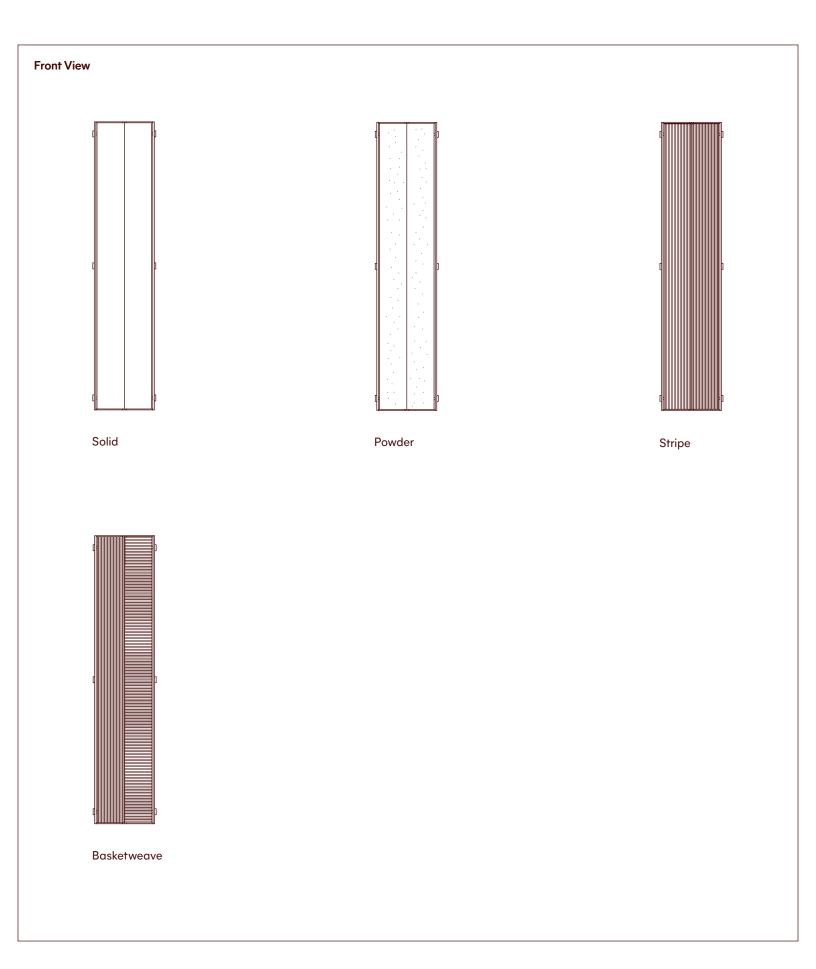

## Solid Glass

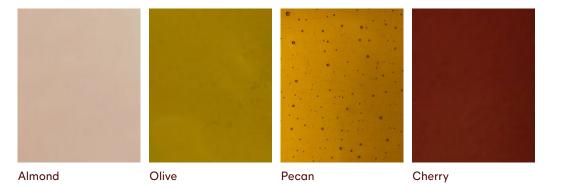

#### **Powder Glass**

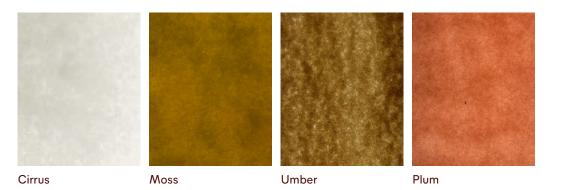

## Striped Glass



### Brass

