

APPEARANCE

Materials Suspension* Finishes Customize Textile, toasted oak, brass 1/8" cable + cord, 8' standard See Material Options page Textiles, Frame sizing

TECHNICAL


Socket / Lamp

E26/ E27 base, G16.5/ A15 bulb

Watt / Volt Lamp detail Recommended up to 25w; up to 300v variable, 1200 lumens, 2700 kelvin, 50000

hours

Dimmer ELV or 0-10V
Certification UL certified
Weight 7 lbs.

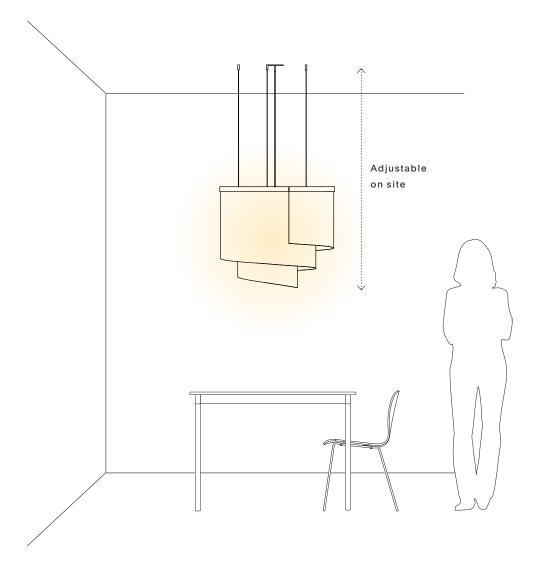

REC. USE / SPACES

Ambient/accent lighting
Dining table
Living room
Stairwell
Entrance
Lobby

PREPARE FOR INSTALL

This is a line voltage fixture compatible with all diming types. Direct wire to suitable supply lines.

A single junction box is required located according to installation instructions.

Three additional non-powered suspension mount points are also required. Ensure points are available with adequate blocking or suitable anchors (not included).



DOLD

Included

E26/ E27 socket with A15 bulb up to 300v 12 Watts



COLOR TEMP

2700K



LUMENS SCALE

1200lm
*this is a diffused
fixture with a soft
warm ambient glow




DIMMING

ELV or 0-10V

OTHER NOTES

Electronic wall dimmer required

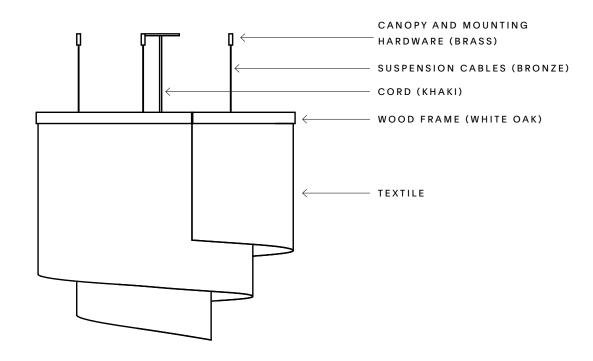

MATERIAL OPTIONS

*A vast array of custom materials and finishes are available for most products upon request.

HARDWARE & CANOPY



Brushed Brass


TEXTILES







Asami

Twinx





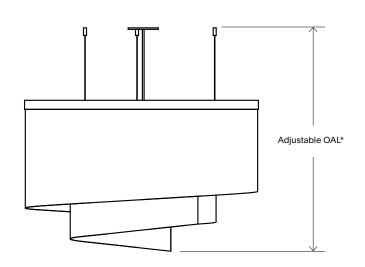

APPEARANCE

Materials Suspension* Finishes Customize Textile, toasted oak, brass 1/8" cable + cord, 8' standard See Material Options page Textiles, Frame sizing

TECHNICAL


Socket / Lamp Watt / Volt E26/ E27 base, G16.5/ A15 bulb Recommended up to 25w; up to 300v

Lamp detail

variable, 1200 lumens, 2700 kelvin, 50000

nours

Dimmer ELV or 0-10V
Certification UL certified
Weight 7 lbs.

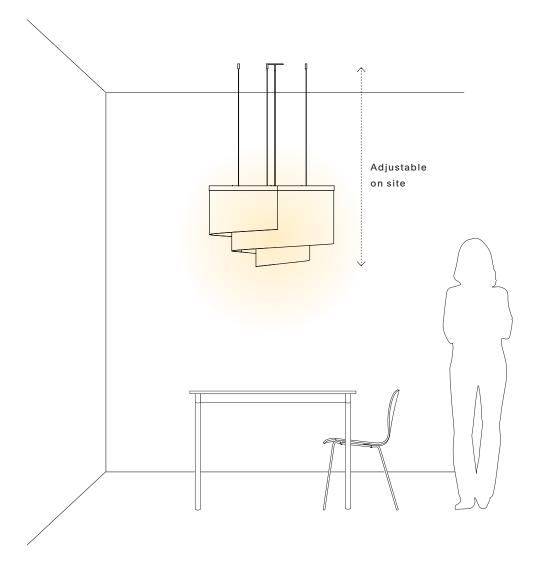

REC. USE / SPACES

Ambient/accent lighting
Dining table
Living room
Stairwell
Entrance
Lobby

PREPARE FOR INSTALL

This is a line voltage fixture compatible with all diming types. Direct wire to suitable supply lines.

A single junction box is required located according to installation instructions.

Three additional non-powered suspension mount points are also required. Ensure points are available with adequate blocking or suitable anchors (not included).



Included

E26/ E27 socket with A15 bulb up to 300v 12 Watts



COLOR TEMP

2700K



LUMENS SCALE

1200lm
*this is a diffused
fixture with a soft
warm ambient glow




DIMMING

ELV or 0-10V

OTHER NOTES

Electronic wall dimmer required

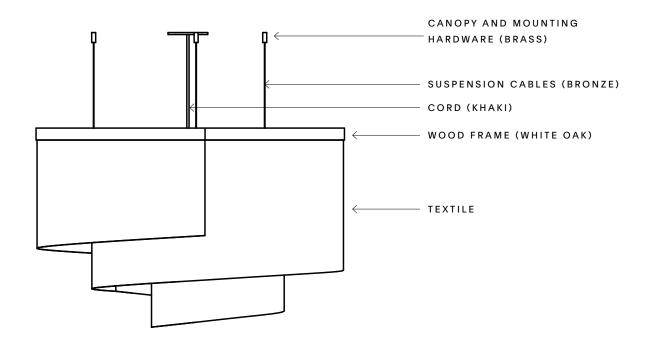

MATERIAL OPTIONS

*A vast array of custom materials and finishes are available for most products upon request.

HARDWARE & CANOPY



Brushed Brass


TEXTILES







Asami

Twinx



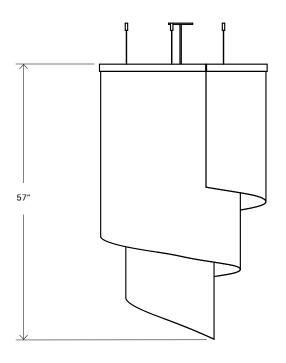

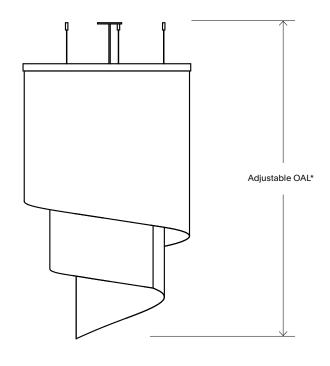

APPEARANCE

Materials Suspension* Finishes Customize Textile, toasted oak, brass 1/8" cable + cord, 8' standard See Material Options page Textiles, Frame sizing


TECHNICAL

Socket / Lamp E26/ E27 base, G16.5/ A15 bulb
Watt / Volt Recommended up to 25w; up to 300v

Lamp detail variable, 1200 lumens, 2700 kelvin, 50000

nours

Dimmer ELV or 0-10V
Certification UL certified
Weight 7 lbs.

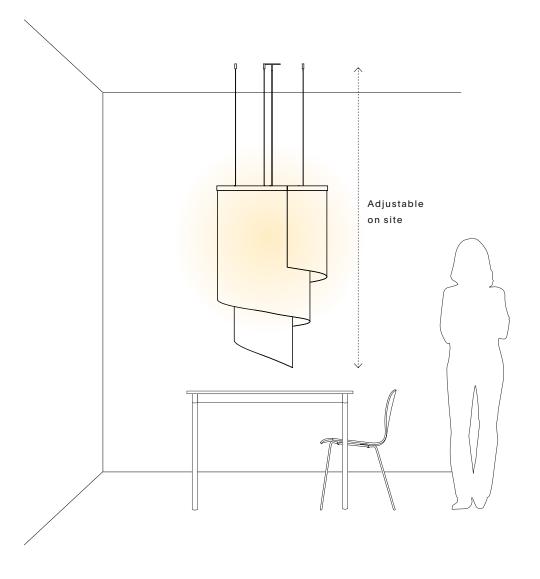

REC. USE / SPACES

Tall spaces Stairwell Entrance Lobby

PREPARE FOR INSTALL

This is a line voltage fixture compatible with all diming types. Direct wire to suitable supply lines.

A single junction box is required located according to installation instructions.

Three additional non-powered suspension mount points are also required. Ensure points are available with adequate blocking or suitable anchors (not included).



BULB

Included

E26/ E27 socket with A15 bulb up to 300v 12 Watts



COLOR TEMP

2700K



LUMENS SCALE

1200lm
*this is a diffused
fixture with a soft
warm ambient glow




DIMMING

ELV or 0-10V

OTHER NOTES

Electronic wall dimmer required

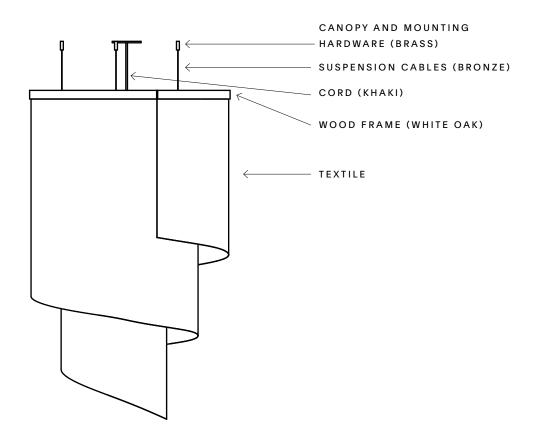

MATERIAL OPTIONS

*A vast array of custom materials and finishes are available for most products upon request.

HARDWARE & CANOPY



Brushed Brass

TEXTILES





Asami

Twinx