



PERFORMANCE

No Shade, Short Diffuser: 1231lm
No Shade, Long Diffuser: 943lm
Small Shade (Clear), Short Diffuser: 1065lm
Small Shade (Clear), Long Diffuser: 923lm
Power Consumption, DC 14.2W

CERTIFICATION

UL Listed
UL Listed to Canadian safety standards.
Suitable for Damp Locations
IP20

PATENT FILE NUMBER

US: Filed Application

LED LIFESPAN

50k hours

SUSPENSION

Canopy configurations : White 7" Round Deep
Canopy, White Trimless Canopy, White Flat Canopy
Stem mount (matte white) or Cable suspension (white)
Cable suspension: min hang height of 6", max of 72"
Stem height: 14" standard, contact sales@rbw.com for custom lengths
Field trimmable

Ample

Pendants

YOUR PRODUCT CODE

AM - - - - - - - -

DESCRIPTION

Ample is a high-output pendant with a visible heat sink, using layered silicone and glass. Available in a wide range of modular designs, Ample casts a soft, diffused light with configurable expression.

MATERIALS

Glass, Aluminum, Silicone

COLLECTION NOTES

Each form of glass is unique. As part of the production process, there may be small air bubbles within the glass.

PRODUCT DIMENSIONS

Small Diffuser, No Shade - 8"h x 5"d
Large Diffuser, No Shade - 10"h x 5"d
Small Diffuser, Small Shade - 8"h x 8"d
Large Diffuser, Small Shade - 10"h x 8"d
Small Diffuser, Large Shade - 10"h x 14"d
Large Diffuser, Large Shade - 10"h x 14"d

PRODUCT WEIGHT

Small Diffuser, No Shade: 6lbs
Large Diffuser, No Shade: 7lbs
Small Diffuser, Small Shade: 9lbs
Large Diffuser, Small Shade: 10lbs
Small Diffuser, Large Shade: 11lbs
Large Diffuser, Large Shade: 12lbs

SPECIFICATION LOGIC

SHADE

No Shade	0
Small Shade	8
Large Shade	14

DIFFUSER STYLE

Short Fluted	A
Long Fluted	B

MOUNTING

Stem Mount	ST
Cable Suspension	CS

GLASS FINISH

Frosted	S22
Frosted Blush	S18
Frosted Smoked	S28
Caramel	S21

HEAT SINK FINISH

Heritage Cream	PC78
Vermillion	PC42
Cobalt	PC52
Custom	PCXX

COLOR TEMPERATURE

2200K	22
2700K	27
3000K	30
3500K	35
4000K	40

DIMMING / CONTROL / INPUT

0.1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V Universal Input (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V

Low Voltage (Driver required, driver not included)
sales@rbw.com

Generate Date: Fri Jul 31 2026 14:14

575 Boices Ln Kingston NY 12401 T +1 212 388 1621

IP RATING

IP 20

IP20

CANOPY

Flat

CN00

Trimless


CD02

Deep Round


CD03

DRAWINGS

ample technical drawing

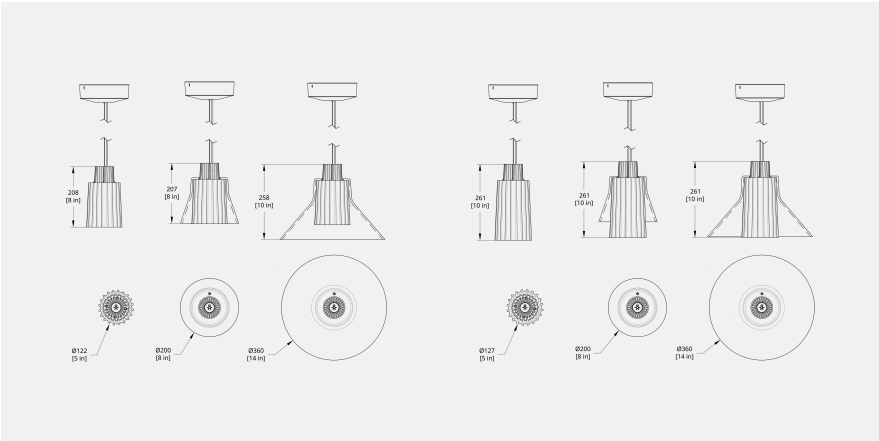

ample technical drawing, trimless canopy

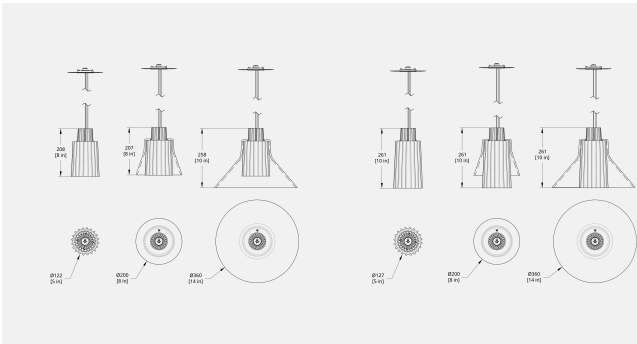

ample technical drawing, flat canopy

