

## Pole

## 02 - Floor to Floor - 4 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 7.2 Watts  
Lumens: 400 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
02 - Floor to Floor - 4 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions


	A	B
Min.	92in / 234cm	78in / 192cm
Preferred	97in / 246cm	76in / 193cm
Max.	102in / 259cm	75in / 190cm

Bases  
(x2) L 5.1in/13cm x W 5.1in/13cm x H 9.9in/25.1cm cylindrical bases in matching metal finish (appx. 35lbs)

Weight  
78.4lb/35.6kg

Cord  
7feet / 2.1m with Universal Wall Plug Power Supply with interchangeable AC Adaptors (Australian type, U.K. type, European type, U.S. type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

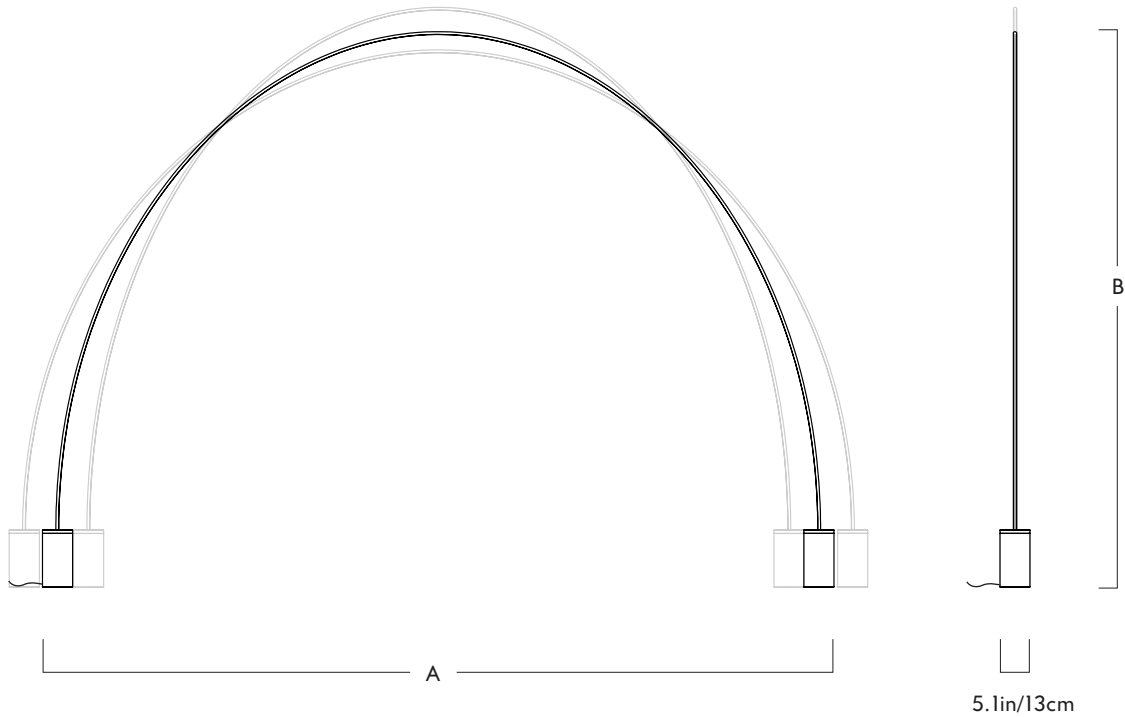

## Pole

## 02 - Floor to Floor - 5 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 9 Watts  
Lumens: 500 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
02 - Floor to Floor - 5 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions


	A	B
Min.	115in / 292cm	95in / 241cm
Preferred	125in / 317cm	91in / 231cm
Max.	136in / 345cm	88in / 224cm

Bases  
(x2) L 5.1in/13cm x W 5.1in/13cm x H 9.9in/25.1cm cylindrical bases in matching metal finish (appx. 35lbs)

Weight  
79lb/35.8kg

Cord  
7feet / 2.1m with Universal Wall Plug Power Supply with interchangeable AC Adaptors (Australian type, U.K. type, European type, U.S. type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

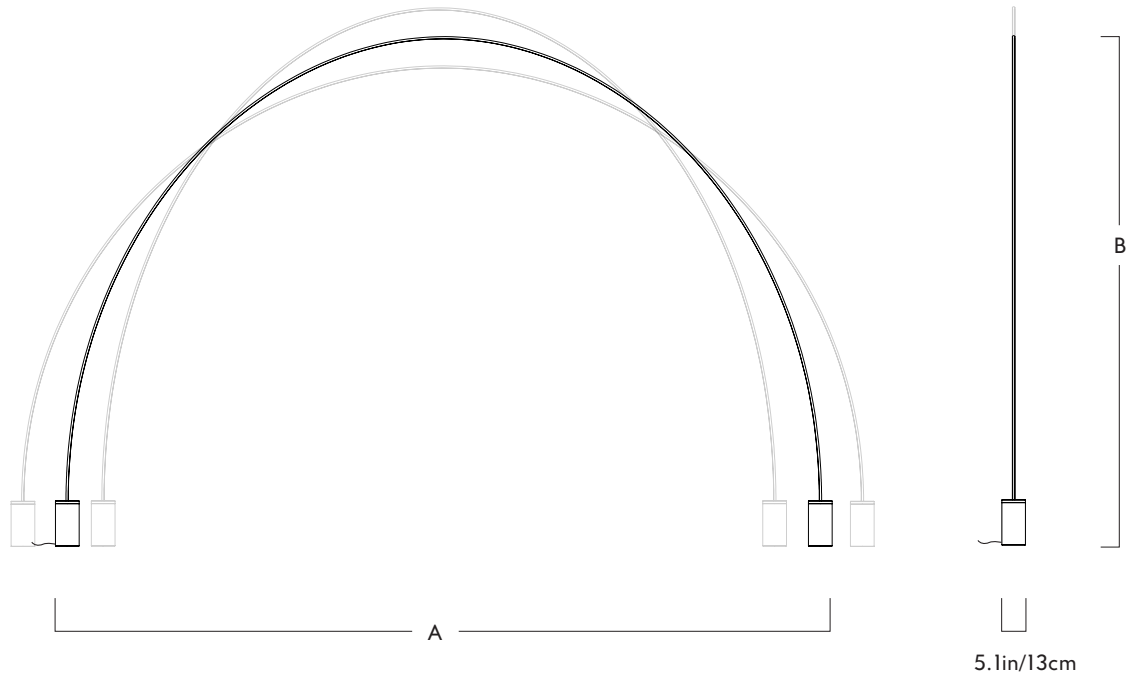

## Pole

## 02 - Floor to Floor - 6 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 10.8 Watts  
Lumens: 600 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
02 - Floor to Floor - 6 Sections

Metal Finishes  
Black

Dimming  
Optional

Dimensions


	A	B
Min.	140in / 356cm	112in / 284cm
Preferred	157in / 399cm	106in / 269cm
Max.	175in / 445cm	100in / 254cm

Bases  
(x2) L 5.1in/13cm x W 5.1in/13cm x H 9.9in/25.1cm cylindrical bases in matching metal finish (appx. 35lbs)

Weight  
79.6lb/36.1kg

Cord  
7feet / 2.1m with Universal Wall Plug Power Supply with interchangeable AC Adaptors (Australian type, U.K. type, European type, U.S. type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

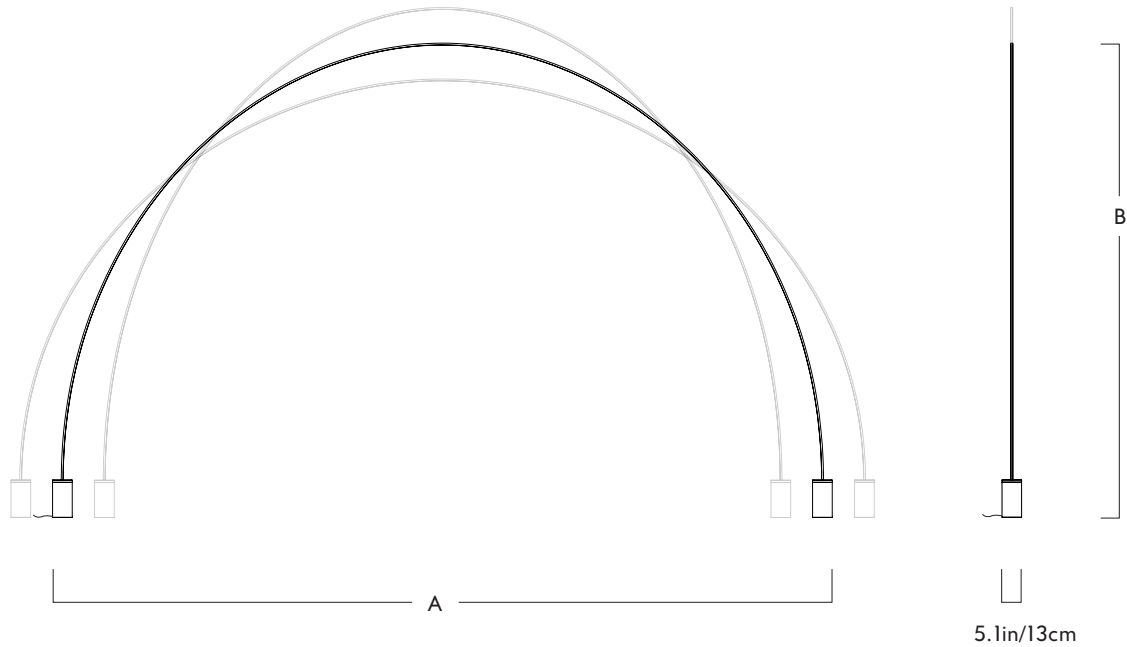

## Pole

## 02 - Floor to Floor - 7 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 12.8 Watts  
Lumens: 700 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
02 - Floor to Floor - 7 Sections

Metal Finishes  
Black

Dimming  
Optional


<u>Dimensions</u>		
	A	B
Min.	170in / 432cm	128in / 325cm
Preferred	191in / 485cm	119in / 302cm
Max.	212in / 538cm	110in / 279cm

Bases  
(x2) L 5.1in/13cm x W 5.1in/13cm x H 9.9in/25.1cm cylindrical bases in matching metal finish (appx. 35lbs)

Weight  
80.2lb/36.4kg

Cord  
7feet / 2.1m with Universal Wall Plug Power Supply with interchangeable AC Adaptors (Australian type, U.K. type, European type, U.S. type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)  
CE (240V)

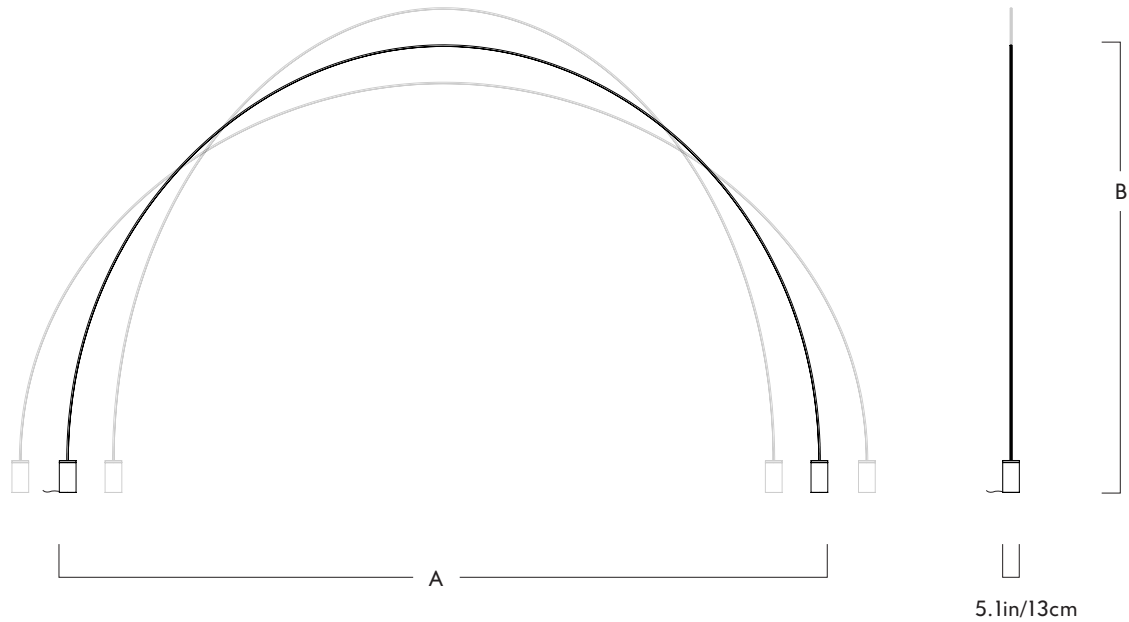

## Pole

## 02 - Floor to Floor - 8 Sections

Series  
Pole

Materials  
Aluminum, steel, silicone

120V/240V Illumination  
Integrated LED  
Wattage: 14.4 Watts  
Lumens: 800 Lumens  
Color Temperature: 2700K, 90CRI  
LED Lifetime: 70,000 Hours

Product  
02 - Floor to Floor - 8 Sections

Metal Finishes  
Black

Dimensions

	A	B
Min.	195in / 495cm	143in / 363cm
Preferred	222in / 564cm	132in / 335cm
Max.	250in / 635cm	121in / 307cm

Bases  
(x2) L 5.1in/13cm x W 5.1in/13cm x H 9.9in/25.1cm cylindrical bases in matching metal finish (appx. 35lbs)

Dimming  
Optional

Weight  
80.8lb/36.6kg

Cord  
7feet / 2.1m with Universal Wall Plug Power Supply with interchangeable AC Adaptors (Australian type, U.K. type, European type, U.S. type). Comes with no On/Off Switch

Certifications  
UL, cUL (120V)