

Ripple Sconce


Sconces



50 Greene St
New York NY 10013
T +1 212 388 1621
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit rbw.com


DESCRIPTION	
Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water.	
MATERIALS	
Cast solid glass, aluminum	
COLLECTION NOTES	
Luminaire lumens listed are for DC input. AC input are within photometry downloads.	
PERFORMANCE	
697 lm (Frosted) 390 lm (White) 341 lm (Smoked) 66 lm (Copper) 414 lm (Jade)	
Power Consumption 10W	
69.1 lm/W (Frosted) 38.7 lm/W (White) 33.8 lm/W (Smoked) 6.5 lm/W (Copper) 41.1 lm/W (Jade)	
90 CRI	
LED LIFESPAN	
50k hours	
CERTIFICATION	
ADA Compliant	
UL Listed	
Suitable for Wet Locations	
IP65	
	
PRODUCT DIMENSIONS	
5" Dia. x 3.3" Depth	
PRODUCT WEIGHT	
3.5 lbs / 2 kg	
DIMENSIONAL WEIGHT	
3 lbs	

YOUR PRODUCT CODE

RP-WS-S21-AA01-27-10_TRIAC_120V-IP65

Specification Logic

GLASS FINISH	
White Interior	S20
Smoked	S21
Frosted	S22
Copper Exterior	S23
Jade	S24
BACKPLATE FINISH	
Natural Anodized	AA01
Black Anodized	AA04
COLOR TEMPERATURE	
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
DIMMING / CONTROL / INPUT	
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
Low Voltage (Driver required, driver not included)	

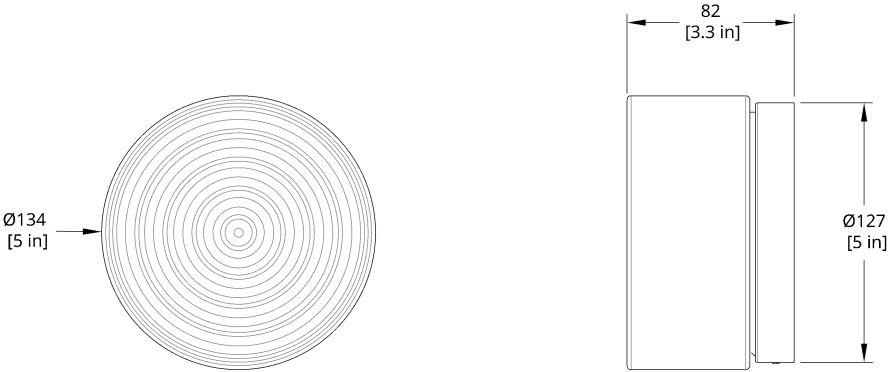

RP-WS Ripple Sponse Dimension (Rotate 90 degrees for flush mount version)