

# Ripple Sconce


Sconces



50 Greene St  
New York NY 10013  
T +1 212 388 1621  
sales@rbw.com



For 2D & 3D drawings of all products, including CAD, Revit and IES files, please visit [rbw.com](http://rbw.com)

<b>DESCRIPTION</b>	
Meet Ripple, a new sconce and flush mount collection distinguished by its substantial solid glass shade. A unique texture of raised, concentric rings brings to mind ripples coursing along the surface of water.	
<b>MATERIALS</b>	
Cast solid glass, aluminum	
<b>COLLECTION NOTES</b>	
Luminaire lumens listed are for DC input. AC input are within photometry downloads.	
<b>PERFORMANCE</b>	
697 lm (Frosted)   390 lm (White)   341 lm (Smoked)   66 lm (Copper)   414 lm (Jade)	
Power Consumption 10W	
69.1 lm/W (Frosted)   38.7 lm/W (White)   33.8 lm/W (Smoked)   6.5 lm/W (Copper)   41.1 lm/W (Jade)	
90 CRI	
<b>LED LIFESPAN</b>	
50k hours	
<b>CERTIFICATION</b>	
ADA Compliant	
UL Listed	
Suitable for Wet Locations	
IP65	
	
<b>PRODUCT DIMENSIONS</b>	
5" Dia. x 3.3" Depth	
<b>PRODUCT WEIGHT</b>	
3.5 lbs / 2 kg	
<b>DIMENSIONAL WEIGHT</b>	
3 lbs	


YOUR PRODUCT CODE

RP-WS-S20-AA04-27-10\_TRIAC\_120V-IP65

Specification Logic

<b>GLASS FINISH</b>	
White Interior	S20
Smoked	S21
Frosted	S22
Copper Exterior	S23
Jade	S24
<b>BACKPLATE FINISH</b>	
Natural Anodized	AA01
Black Anodized	AA04
<b>COLOR TEMPERATURE</b>	
2700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35
<b>DIMMING / CONTROL / INPUT</b>	
0.1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	0.1_10V_UNV
1% Dimming, 0-10V Control, 120V or 277V "Universal Input" (Driver External)	1_10V_UNV
1% Dimming, TRIAC / Forward Phase Control, 120V Input (Driver External)	1_TRIAC_120V
10% Dimming, TRIAC / Forward Phase Control, 120V Input	10_TRIAC_120V
Low Voltage (Driver required, driver not included)	



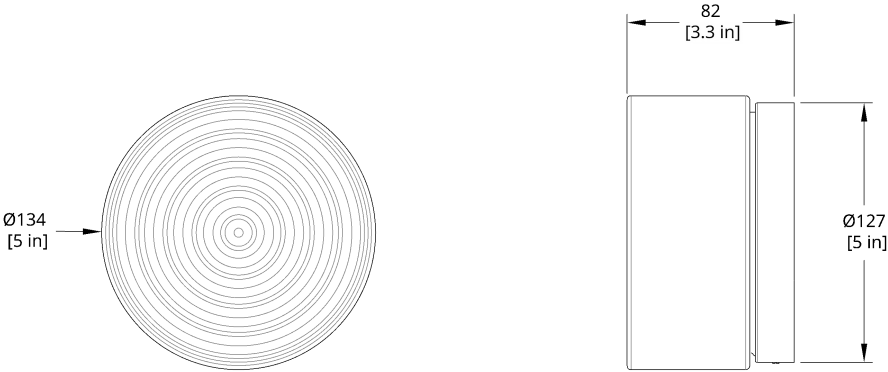

RP-WS Ripple Sponse Dimension (Rotate 90 degrees for flush mount version)