

Rich Brilliant Willing

50 Greene St
Floor 2
New York NY 10013
T +1 212 388 1621
sales@richbrilliantwilling.com



Shown: HP-21B-24-27-120-IP65

Hoist Pendant

Design Partners
Meyer Davis

Description
Pendant with molded plug
Dual mount—convertible to a
hardwire fixture with included
canopy

Materials
Opal glass diffuser, steel shade,
aluminum module

LED Lifespan
50k hours

Certification
Wet location



Product Codes SKU

HP-21B-24-27-120-IP65 shown above

HP	21B	24	27	120	IP65
	model	finish	CCT	voltage	IP

Model 21B, 14B, 08A, A, B
Finish 24 Cream, 36 Blue,
30 Black
CCT 2700K
Voltage 100/120V, 220/240V
IP IP65

Dimensions
21 Ø x 7 in Height
53 Ø x 18 cm Height

Cord Length
16 ft / 426 cm

Lamping
1 x 8.5W LED
2700K min 80 CRI
700 Lumen source

Canopy
Dia 5 in / 13 cm

Product Weight
6.6 lb. / 3.0 kg.

Specs
655 Lumens (delivered)
120V Input 50/60Hz (US & CAN)
220V Input 50/60Hz (Optional)

Swag Kit (optional)
HP-P2-(finish)
pair of swag cable grips and
mounting hardware
2.5 Ø x 1 in Depth
6 Ø x 2.2 cm Depth

Dimming
TRIAC Dimming 10-100%

triode³ design

28, rue Jacob 75006 Paris
+33 (0)1 43 29 40 05

contact@triodedesign.com
www.triodedesign.com

Rich Brilliant Willing

50 Greene St
Floor 2
New York NY 10013
T +1 212 388 1621
sales@richbrilliantwilling.com



Shown: HP-14B-30-27-120-IP65

Hoist Pendant

Design Partners
Meyer Davis

Description
Pendant with molded plug
Dual mount—convertible to a
hardwire fixture with included
canopy

Materials
Opal glass diffuser, steel shade,
aluminum module

LED Lifespan
50k hours

Certification
Wet location



Product Codes SKU

HP-14B-30-27-120-IP65 shown above

HP	14B	30	27	120	IP65
model	finish	CCT	voltage	IP	

Model 21B, 14B, 08A, A, B
Finish 24 Cream, 36 Blue,
30 Black
CCT 2700K
Voltage 100/120V, 220/240V
IP IP65

Lamping
1 x 8.5W LED
2700K min 80 CRI
700 Lumen source

Specs
655 Lumens (delivered)
120V Input 50/60Hz (US & CAN)
220V Input 50/60Hz (Optional)

Dimming
TRIAC Dimming 10-100%

Dimensions
14 Ø x 7 in Height
36 Ø x 18 cm Height

Cord Length
16 ft / 426 cm

Canopy
Dia 5 in / 13 cm


Product Weight
5.3 lb. / 2.4 kg.

Swag Kit (optional)
HP-P2-(finish)
pair of swag cable grips and
mounting hardware
2.5 Ø x 1 in Depth
6 Ø x 2.2 cm Depth

triode³ design

Rich Brilliant Willing

50 Greene St
Floor 2
New York NY 10013
T +1 212 388 1621
sales@richbrilliantwilling.com

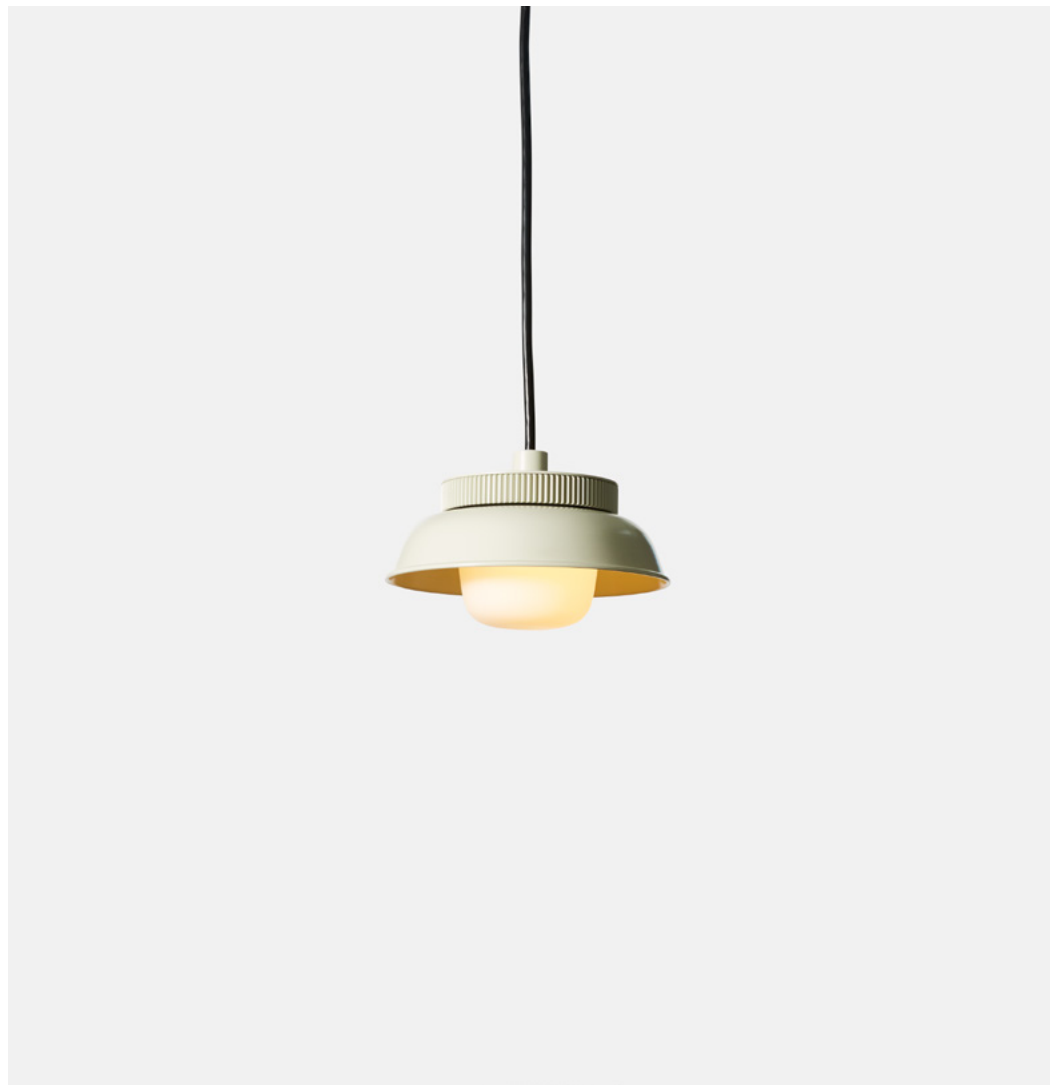

Shown: HP-08A-24-27-120-IP65

Hoist Pendant

Design Partners
Meyer Davis

Description
Pendant with molded plug
Dual mount—convertible to a
hardwire fixture with included
canopy

Materials
Opal glass diffuser, steel shade,
aluminum module

LED Lifespan
50k hours

Certification
Wet location



triode³ design

28, rue Jacob 75006 Paris
+33 (0)1 43 29 40 05

contact@triodedesign.com
www.triodedesign.com

Product Codes SKU

HP-08A-24-27-120-IP65 shown above

HP	08A	24	27	120	IP65
model	finish	CCT	voltage	IP	

Model 21B, 14B, 08A, A, B
Finish 24 Cream, 36 Blue,
30 Black
CCT 2700K
Voltage 100/120V, 220/240V
IP IP65

Dimensions
8 Ø x 5 in Height
20 Ø x 13 cm Height

Cord Length
16 ft / 426 cm

Lamping
1 x 8.5W LED
2700K min 80 CRI
700 Lumen source

Canopy
Dia 5 in / 13 cm

Product Weight
4.0 lb. / 1.8 kg.

Specs
581 Lumens (delivered)
120V Input 50/60Hz (US & CAN)
220V Input 50/60Hz (Optional)

Swag Kit (optional)
HP-P2-(finish)
pair of swag cable grips and
mounting hardware
2.5 Ø x 1 in Depth
6 Ø x 2.2 cm Depth

Dimming
TRIAC Dimming 10-100%

Rich Brilliant Willing

50 Greene St
Floor 2
New York NY 10013
T +1 212 388 1621
sales@richbrilliantwilling.com



Shown: HP-B-24-27-120-IP65

Hoist Pendant

Design Partners
Meyer Davis

Description
Pendant with molded plug
Dual mount—convertible to a
hardwire fixture with included
canopy

Materials
Opal glass diffuser, steel shade,
aluminum module

LED Lifespan
50k hours

Certification
Wet location



Product Codes SKU

HP-B-24-27-120-IP65 shown above

HP	-	B	-	24	-	27	-	120	-	IP65
		model		finish		CCT		voltage		IP

Model 21B, 14B, 08A, A, B
Finish 24 Cream, 36 Blue,
30 Black
CCT 2700K
Voltage 100/120V, 220/240V
IP IP65

Lamping
1 x 8.5W LED
2700K min 80 CRI
700 Lumen source

Specs
655 Lumens (delivered)
120V Input 50/60Hz (US & CAN)
220V Input 50/60Hz (Optional)

Dimming
TRIAC Dimming 10-100%

Dimensions
5.6 Ø x 7 in Height
14 Ø x 18 cm Height

Cord Length
16 ft / 426 cm

Canopy
Dia 5 in / 13 cm

Product Weight
3.1 lb. / 1.4 kg.

Swag Kit (optional)
HP-P2-(finish)
pair of swag cable grips and
mounting hardware
2.5 Ø x 1 in Depth
6 Ø x 2.2 cm Depth

triode³ design

28, rue Jacob 75006 Paris
+33 (0)1 43 29 40 05

contact@triodedesign.com
www.triodedesign.com

Rich Brilliant Willing

50 Greene St
Floor 2
New York NY 10013
T +1 212 388 1621
sales@richbrilliantwilling.com



Shown: HP-A-24-27-120-IP65

Hoist Pendant

Design Partners
Meyer Davis

Description
Pendant with molded plug
Dual mount—convertible to a
hardwire fixture with included
canopy

Materials
Opal glass diffuser, steel shade,
aluminum module

LED Lifespan
50k hours

Certification
Wet location



Product Codes SKU

HP-A-24-27-120-IP65 shown above

HP	-	A	-	24	-	27	-	120	-	IP65
		model		finish		CCT		voltage		IP

Model 21B, 14B, 08A, A, B
Finish 24 Cream, 36 Blue,
30 Black
CCT 2700K
Voltage 100/120V, 220/240V
IP IP65

Lamping
1 x 8.5W LED
2700K min 80 CRI
700 Lumen source

Specs
581 Lumens (delivered)
120V Input 50/60Hz (US & CAN)
220V Input 50/60Hz (Optional)

Dimming
TRIAC Dimming 10-100%

Dimensions
5.5 Ø x 5 in Height
14 Ø x 13 cm Height

Cord Length
16 ft / 426 cm

Canopy
Dia 5 in / 13 cm

Product Weight
2.7 lb. / 1.2 kg.

Swag Kit (optional)
HP-P2-(finish)
pair of swag cable grips and
mounting hardware
2.5 Ø x 1 in Depth
6 Ø x 2.2 cm Depth

triode³ design